


GG MOD TO ACE PULSE COMMANDER
 ★ MOD PARTS, R17, 18, 24 & C17 & S2, 3
 R17 • CAN BE 100K

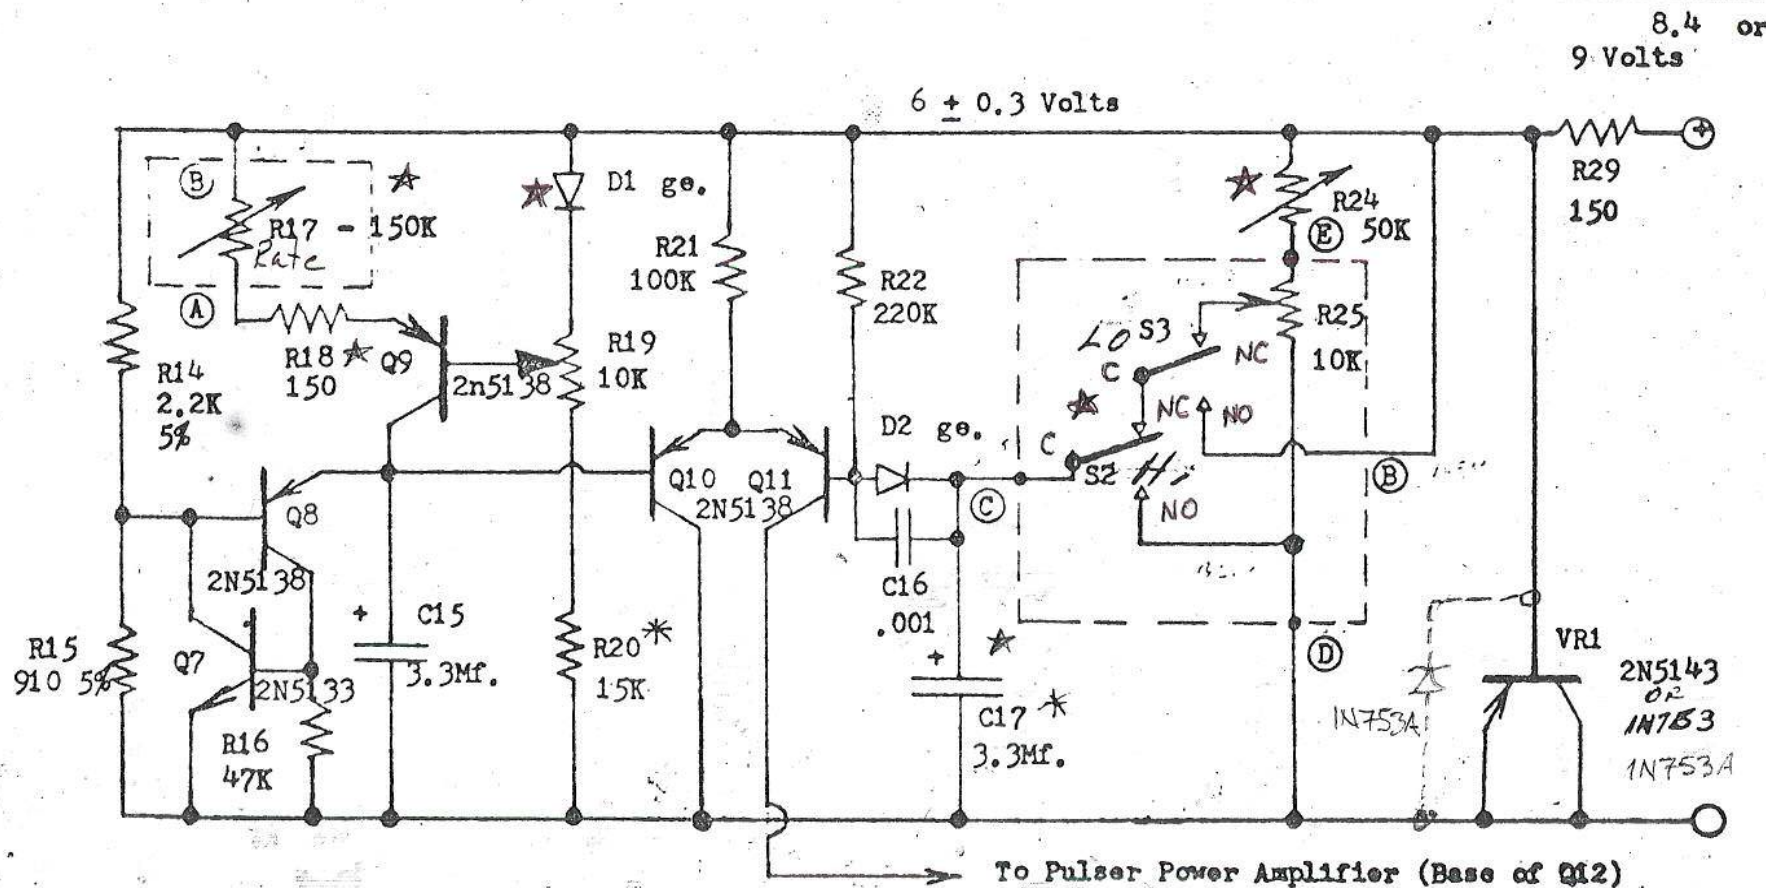

PULSER - FOR GALLOPING GHOST VERSION ONLY

NOTES:

1. All components mount on printed circuit board except those shown in boxes (dashed lines).
2. R17 is the pulse rate stick pot.
3. R19 is the pulse rate center frequency adjustment trimmer resistor.
4. R24 is the pulse width ratio sensitivity adjustment trimmer resistor.
5. R25 is the pulse width stick potentiometer.
6. S2 and S3 are low throttle (steady RF) and high throttle (steady tone) switches, respectively.
7. Encircled letters indicate wire attach points on the printed circuit board.
8. See adjustment procedures for setting up all variable resistors.
9. Component designations R23, R26, R27, C14, and S4 not used.
10. Asterisk (*) indicates component values different from 1970 version.

DATE
 2 August 1970
 REVISED
 7106 JMW/DZ4

MCDONNELL
 ST. LOUIS, MISSOURI

REPORT
 MODEL