

# NE544 Servo Amplifier

## Product Specification

### DESCRIPTION

The NE544 is a servo amplifier and pulse-width demodulator with internal motor drive transistors. It is designed for remote control applications in digital proportional systems but can be used in many other closed-loop position control applications. It incorporates a linear one-shot for improved positional accuracy and outputs for external PNP motor drive transistors.

### FEATURES

- 500mA load current capability
- Bidirectional bridge output with single power supply
- Low standby power drain
- Adjustable deadband and trigger thresholds
- High linearity, 0.5% maximum error
- Output drive for external PNP transistors (optional)
- Wide supply voltage range

### APPLICATIONS

- Miniature position servo
- Robotics
- Control devices
- Remote positioning


### ORDERING INFORMATION

DESCRIPTION	TEMPERATURE RANGE	ORDER CODE
14-Pin Plastic DIP	0 to +70°C	NE544N
16-Pin Plastic SOL Package	0 to +70°C	NE544D

### ABSOLUTE MAXIMUM RATINGS $T_A = 25^\circ\text{C}$ unless otherwise specified.

SYMBOL	PARAMETER	RATING	UNIT
V+	Supply voltage	6.0	V
$I_O$	Output current D package N package	400 500	mA
$T_A$	Operating temperature	0 to +70	°C
$T_{STG}$	Storage temperature	-65 to +150	°C


### PIN CONFIGURATIONS

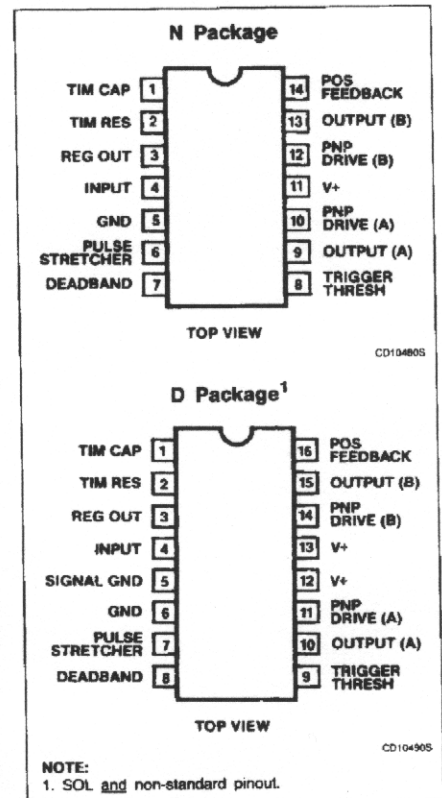

# Servo Amplifier

# NE544


## BLOCK DIAGRAM

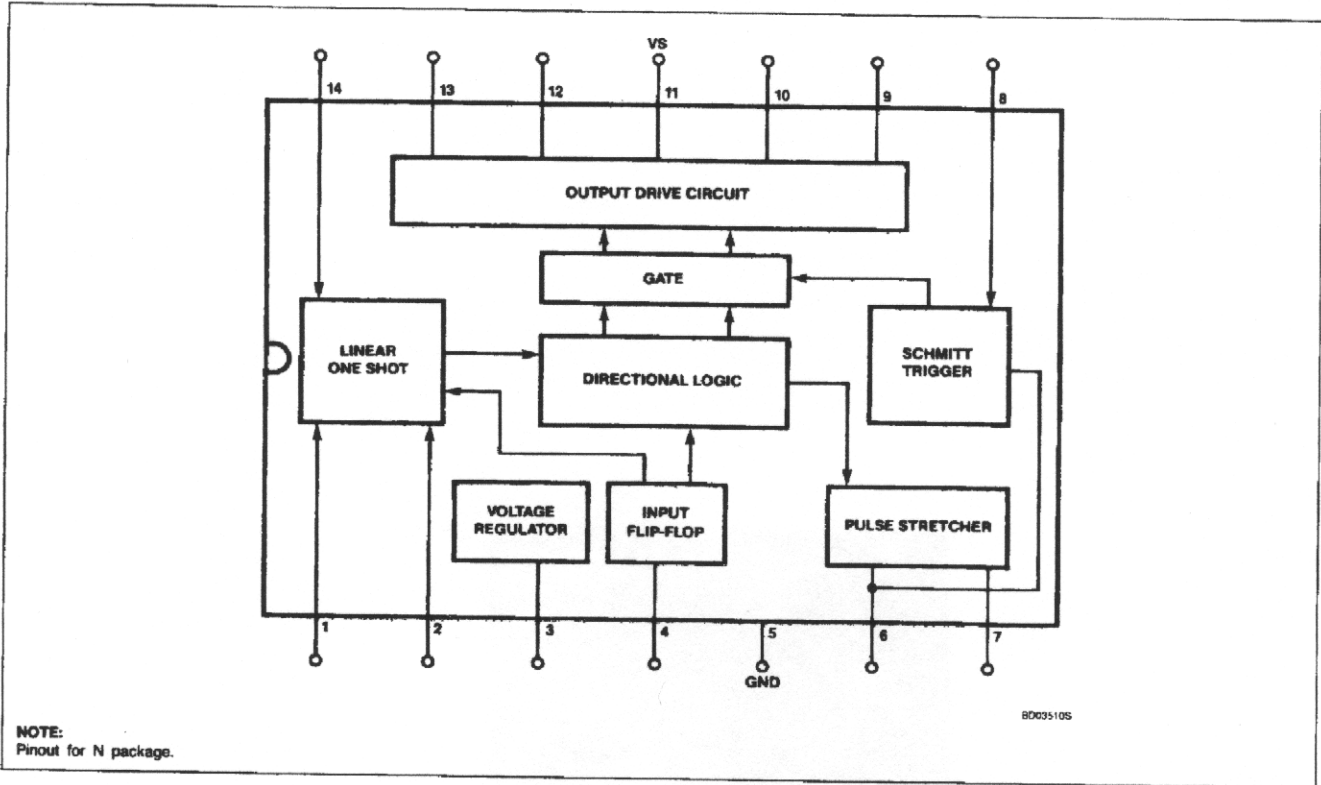

# Servo Amplifier

# NE544

## EQUIVALENT SCHEMATIC

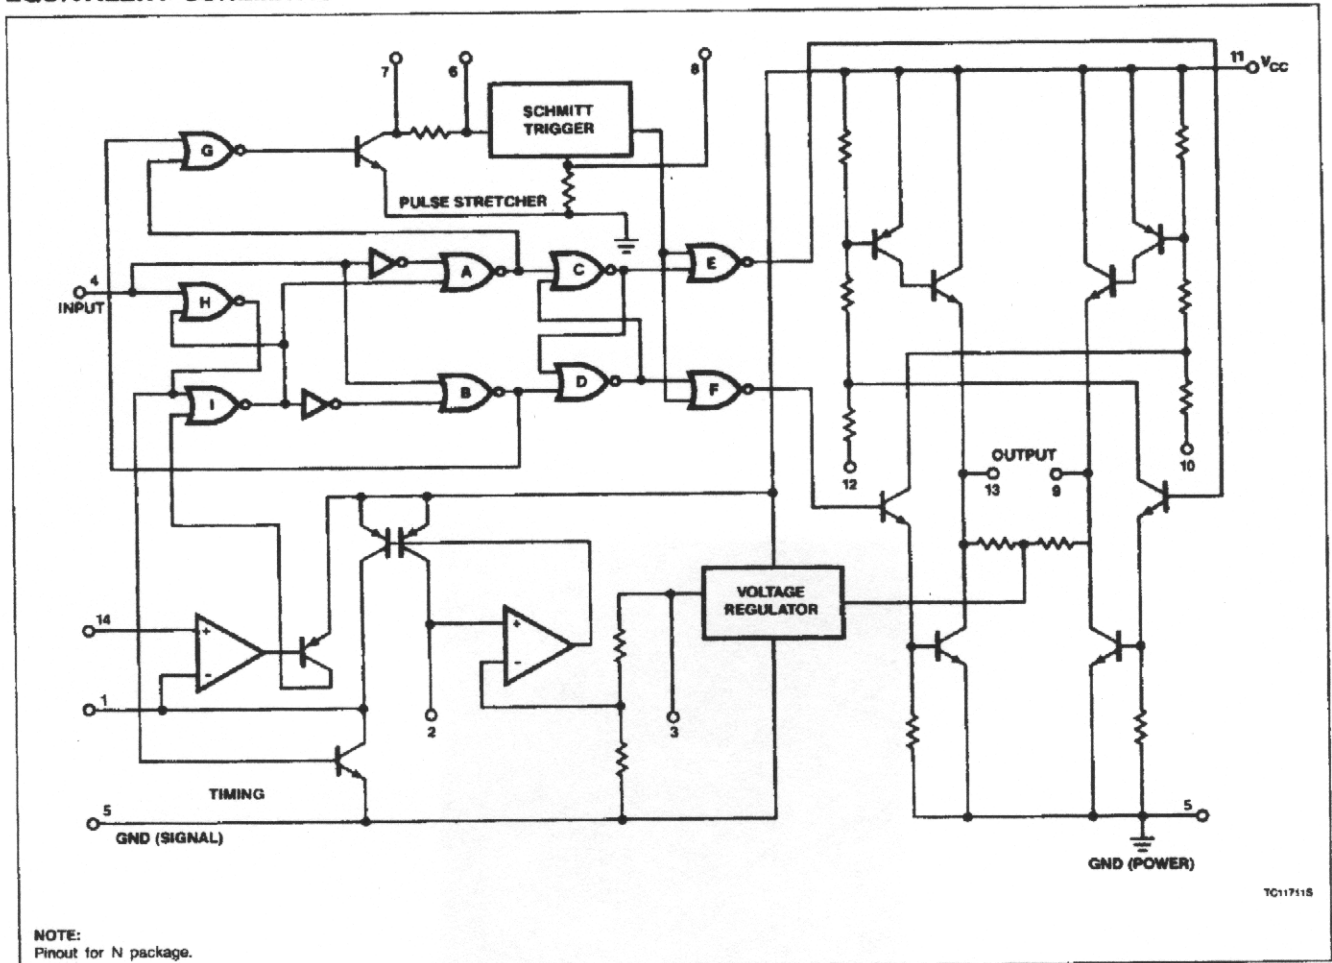


# Servo Amplifier

# NE544

## DC ELECTRICAL CHARACTERISTICS $T_A = 25^\circ\text{C}$ , $V_S = 4.8\text{V}$ unless otherwise specified.

SYMBOL	PARAMETER	TEST CONDITIONS	LIMITS			UNIT
			MIN	TYP	MAX	
$V_{CC}$	Supply voltage	Quiescent	3.2	4.8	6	V
$I_{CC}$	Supply current, Pin 11		4.2	5.5	10	mA
$V_{TH}$	Input threshold, Pin 4			1.5		V
	On			1.4		
$Z_{IN}$	Input resistance, Pin 4			18		k $\Omega$
$V_{OL}$	Output voltage	Pin 9 or 13. $I_L = 400\text{mA}$		0.3		V
$V_{OH}$	Low			3.9		
$V_{REG}$	Regulated voltage, Pin 3		2.1	2.5	2.9	V
$\Delta V_{REG}$	Regulation, Pin 3	$3.9\text{V} \leq V_{CC} \leq 6\text{V}$ $R_{DB} = 0$		10		mV/V
	Minimum deadband, Pin 7			1		$\mu\text{s}$
	One-shot temperature coefficient			0.01		%/ $^\circ\text{C}$
	Standby output voltage	Pins 9 and 13		2.5		V
	PNP drive current	Pins 10 and 12		20		mA


## TYPICAL CONNECTION OF NE544N FOR LINEAR ONE-SHOT TIMING

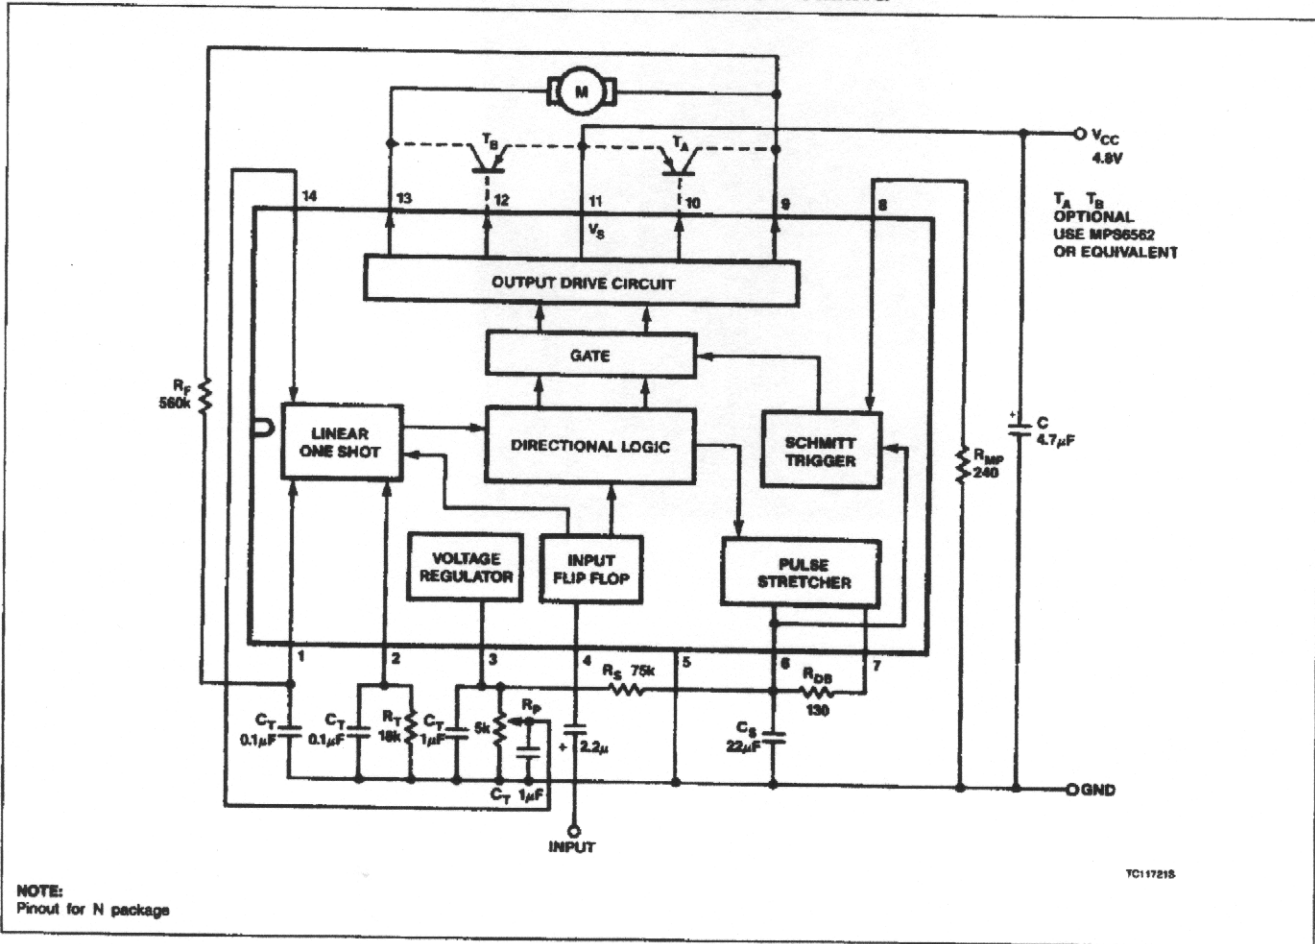

# Servo Amplifier

# NE544

## PC BOARD — N PACKAGE

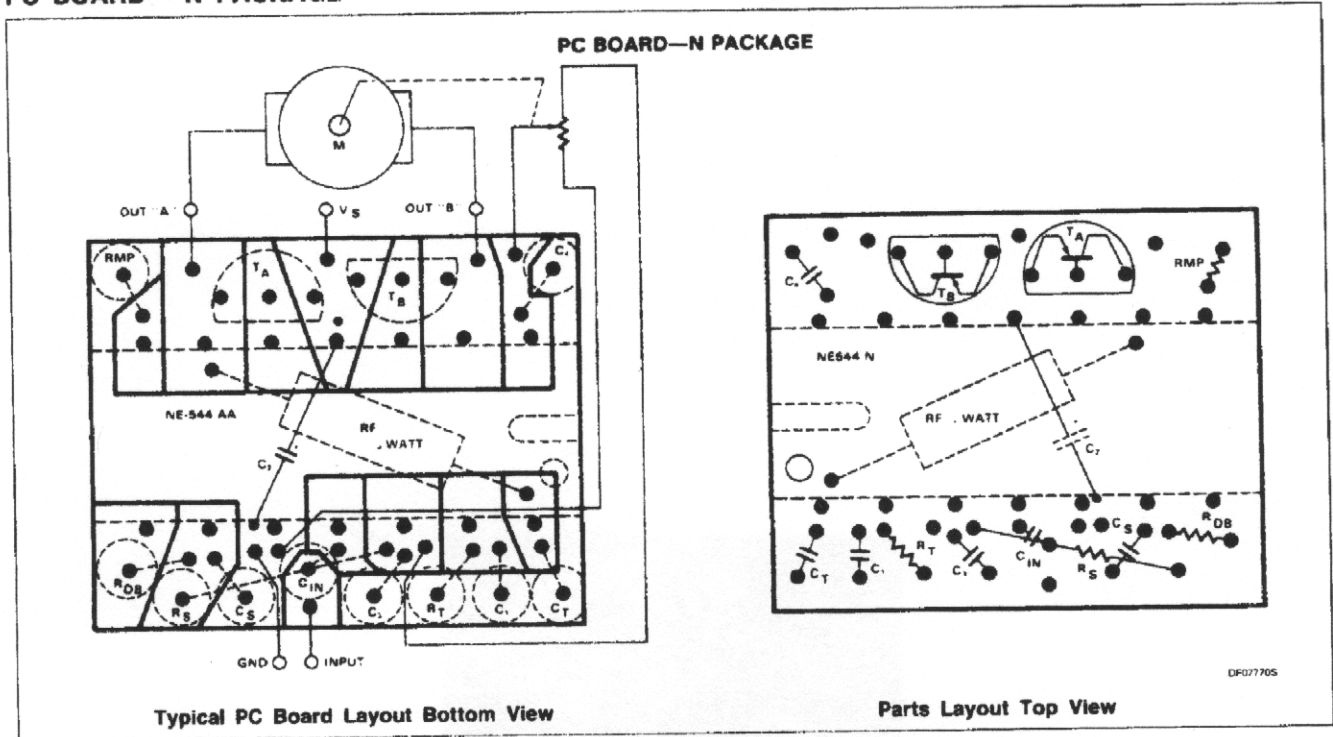

# Servo Amplifier

# NE544

## TYPICAL PERFORMANCE CHARACTERISTICS

