
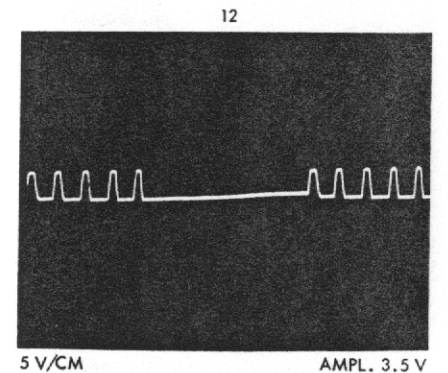
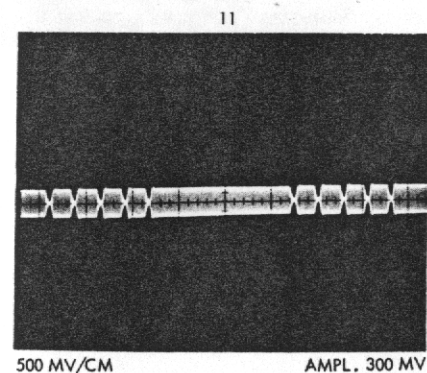
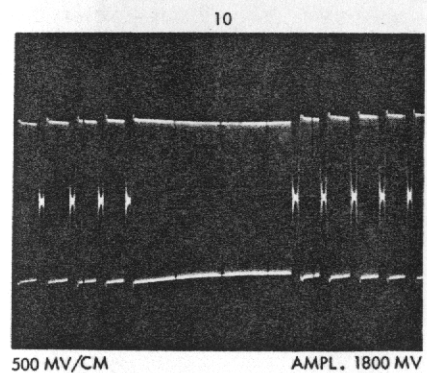
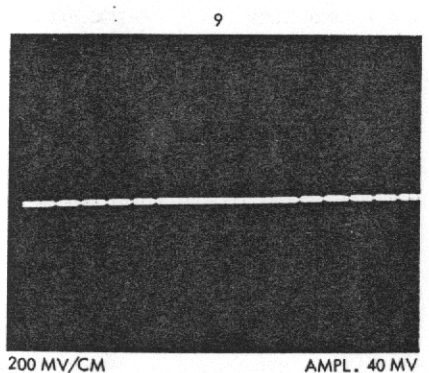
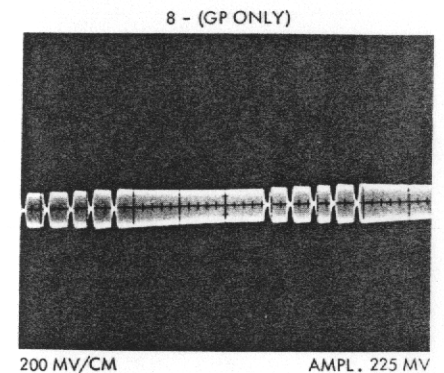
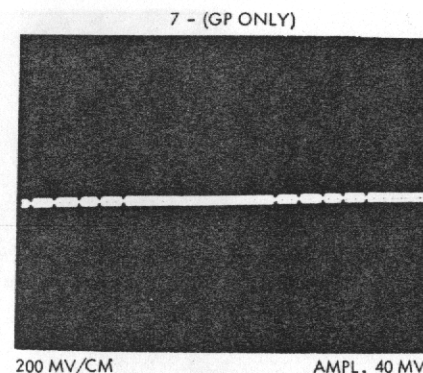
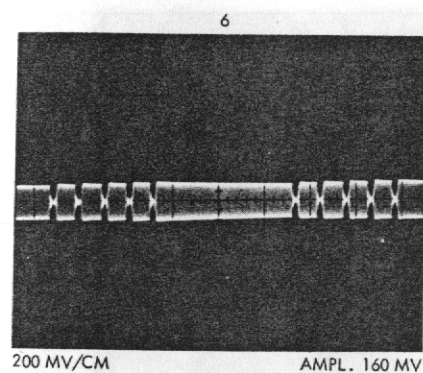
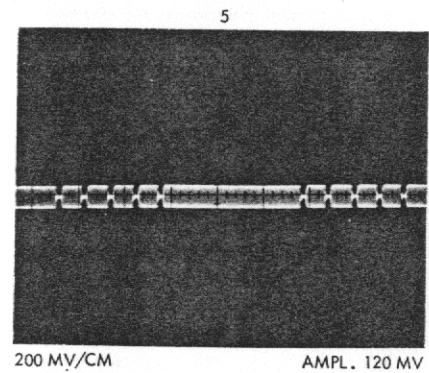
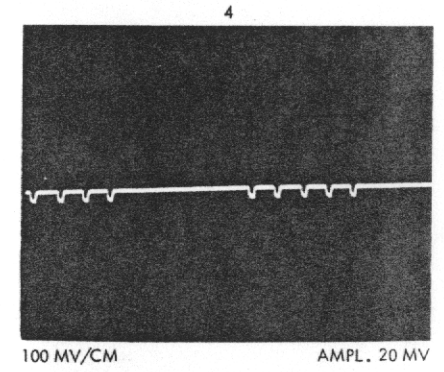
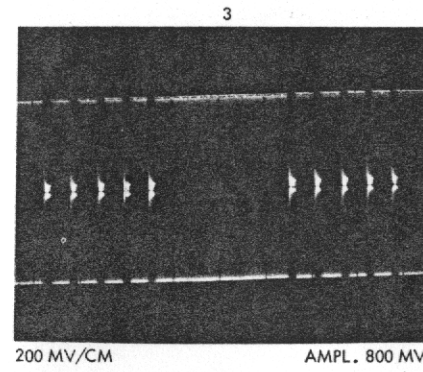
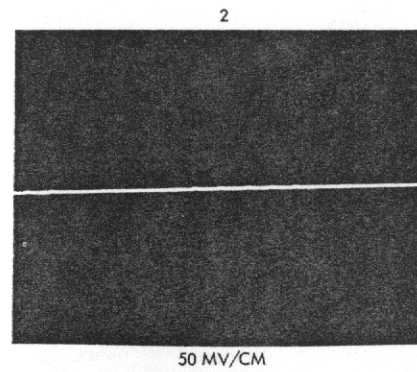


15 November 1976

1977 Receiver Waveforms (Sheet 1 of 2)
(All Receivers)

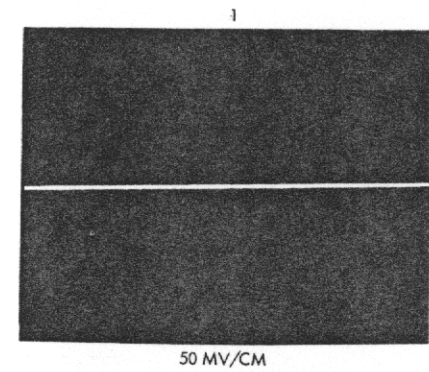


NOTES

1. Numbers refer to schematic drawing test points.
2. Except where noted, waveforms apply to all models of Cannon Receivers.
3. Oscilloscope vertical sensitivity settings and signal amplitude shown below each waveform.
4. Horizontal sweep settings (all waveforms) approximately 2 M sec/CM.
5. Transmitter (with 3 inch antenna), located 3 feet from receiver, serves as signal generator.
6. Four - Channel logic shown.


15 November 1976

1977 Receiver Waveforms (Sheet 2 of 2)
(All Receivers)


13 - (520 SERIES)

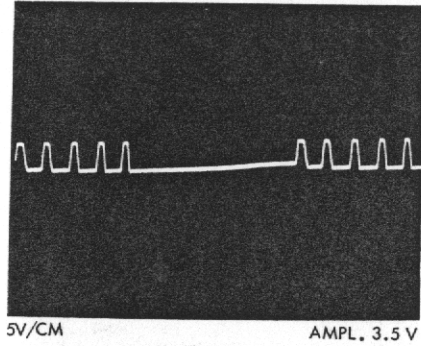


13 - (GP & 540R6)

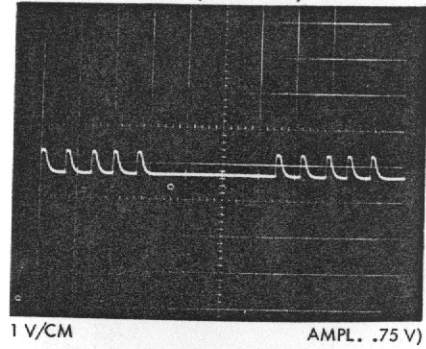


14

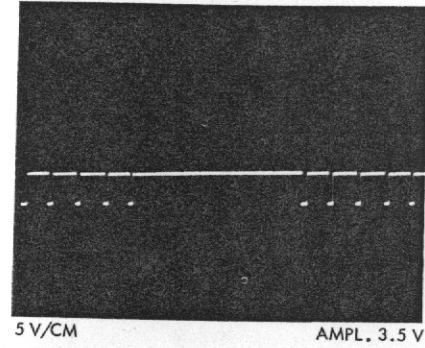


15

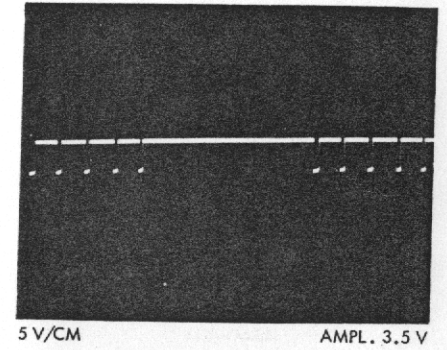


16

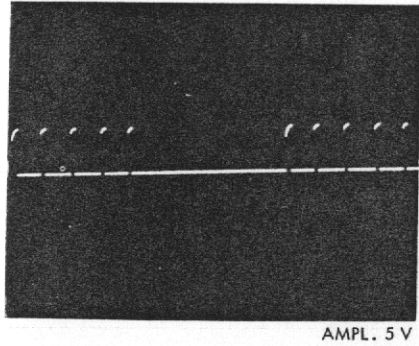


17

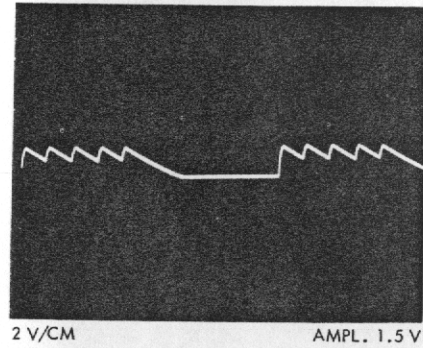

18 - (74L164 I.C.)

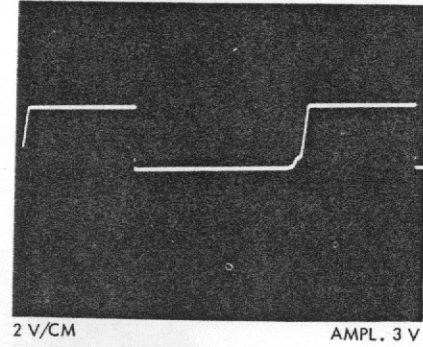


18 - (74C164 I.C.)

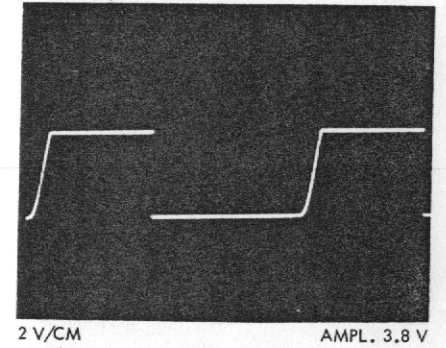


NO SERVO

19 - (74L164 I.C.)

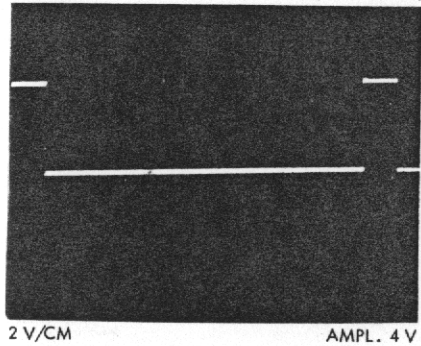


SERVO CONNECTED

19 - (74L164 I.C.)

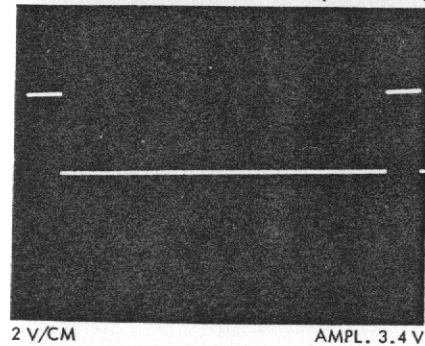


NO SERVO

19 - (74C164 I.C.)

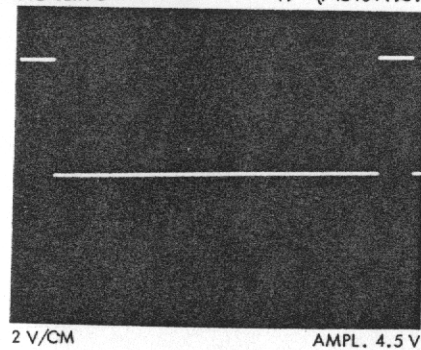

SERVO CONNECTED

19 - (74C164 I.C.)

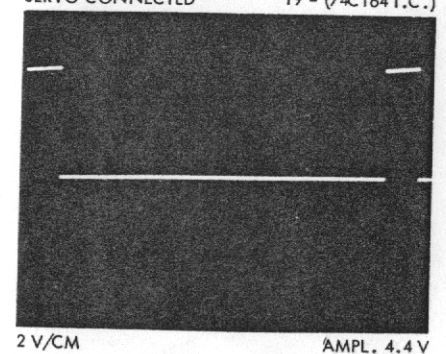

NOTES

1. Numbers refer to schematic drawing test points.
2. Except where noted, waveforms apply to all models of Cannon Receivers.
3. Oscilloscope vertical sensitivity settings and signal amplitude shown below each waveform.
4. Horizontal sweep settings (all waveforms) approximately 2 M sec/CM.
5. Transmitter (with 3 inch antenna), located 3 feet from receiver, serves as signal generator.
6. Four - Channel logic shown.