

Specifications

- Wt. 1.4 oz.
- DRAIN 250 MA.
- Push-Pull Out Put
- Travel 5/16"
- Rigid Impact Case
- Replaceable Brushes
- Vibration Immune
- Flat Compact Design
- Size 15/16 x 1 3/16 x 3 5/16
- Motor And Gears Permanently Located

COBB
HOBBY's

Ouncer


MULTI-SERVO

COBB HOBBY MFG. CO.
Powder Springs, Ga.


Phone Marietta, Ga. 427-3405

features

- Linear Travel
- Thread Adjustable Push-rod Connection
- Fully Enclosed NO DIRT CAN ENTER TO HINDER OPERATION
- Low Drain - High Power

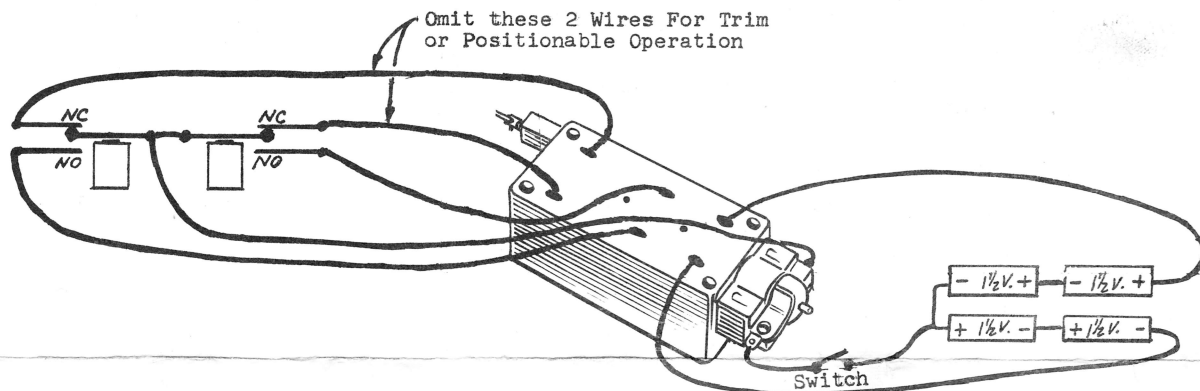

OUNCER WIRING DIAGRAM


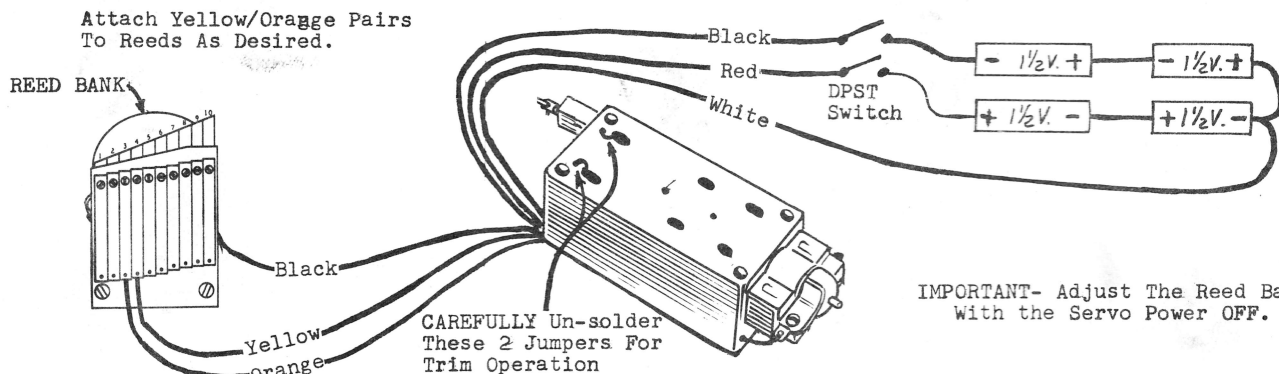


IMPORTANT- Adjust The Reed Bank With the Servo Power OFF.


No Bias Connection is Used With The OUNCER

RLS (Relayless) OUNCER WIRING DIAGRAM



SEE OTHER SIDE FOR OTHER INSTALLATION DATA

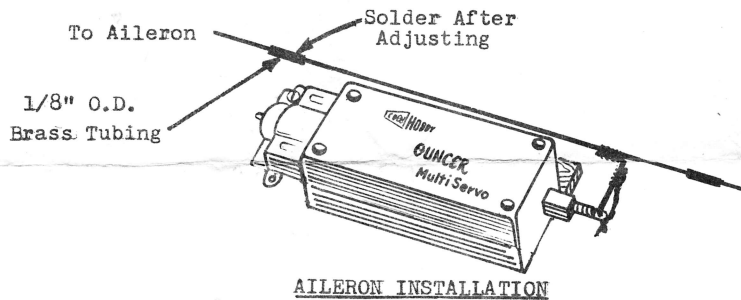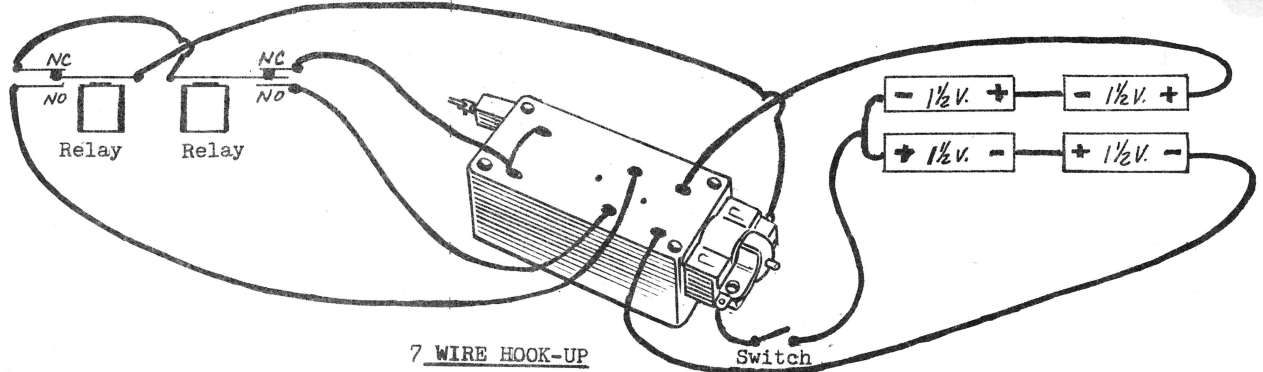


BROAD NEUTRAL



For Broad Neutral Cut Copper With Xacto Knife and Trim Off.

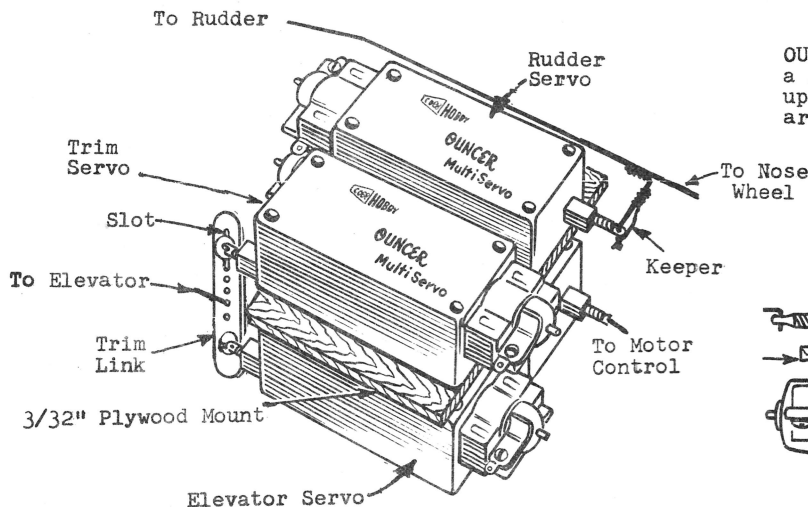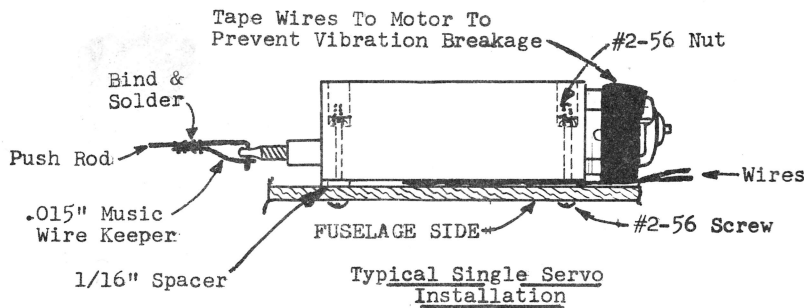

The small cross section size of the OUNCER allows installation of 4 servos in a fuselage only 2 1/2" wide and only takes up 2 1/8" in depth. Bicycle spoke nipples are used as adapters as shown.

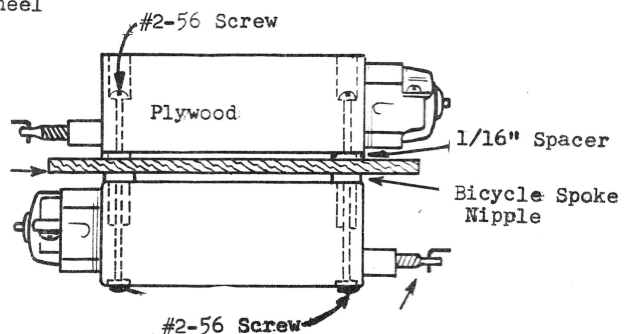

4 PACK INSTALLATION