

Specifications

- Wt. 1.4 oz.
- DRAIN 350 MA.
- Push-Pull Out Put
- Travel 5/16"
- Rigid Impact Case
- Replaceable Brushes
- Vibration Immune
- Flat Compact Design
- Size 15/16 x 1 3/16 x 3 5/16
- Motor And Gears Permanently Located

COBB
HOBBY's

Ouncer


MULTI-SERVO

COBB HOBBY MFG. CO.
Powder Springs, Ga.


Phone Marietta, Ga. 427-3405

features

- Linear Travel
- Thread Adjustable Push-rod Connection
- Fully Enclosed NO DIRT CAN ENTER TO HINDER OPERATION
- Low Drain - High Power

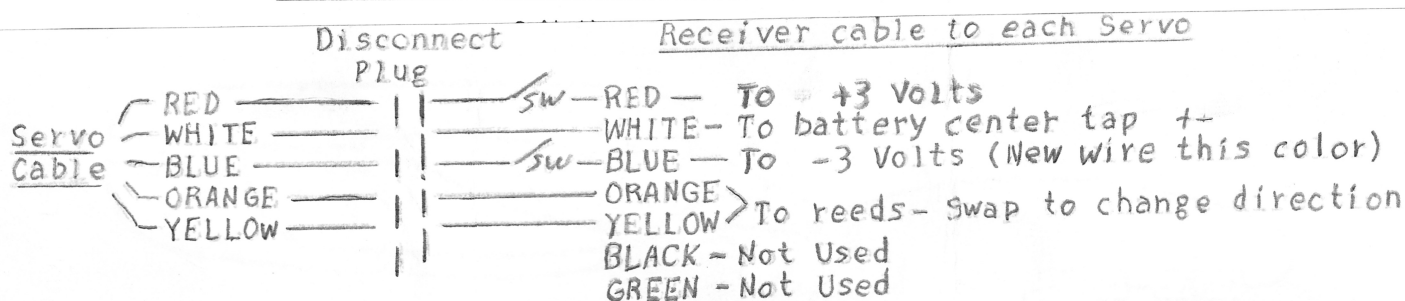



NOTE - There is no connection between the filament and servo batteries

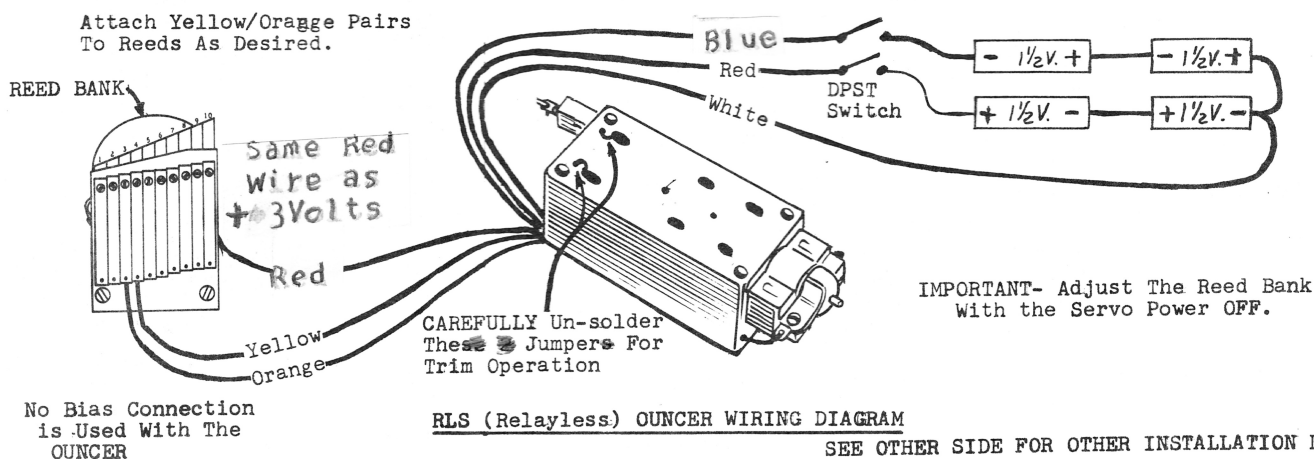


IMPORTANT INSTRUCTIONS

Your RLS OUNCER has been carefully tested.....


1. Do not open the case,, But if you must--Do so CAREFULLY
2. Will operate up to 130° F
3. Will operate on a standard reed bank.
4. Please check battery polarity carefully
5. Operating two reeds will not cause damage.
6. Do not, please do not "Work" on the Servo. We will Service them for \$1.50 each plus parts and postage.

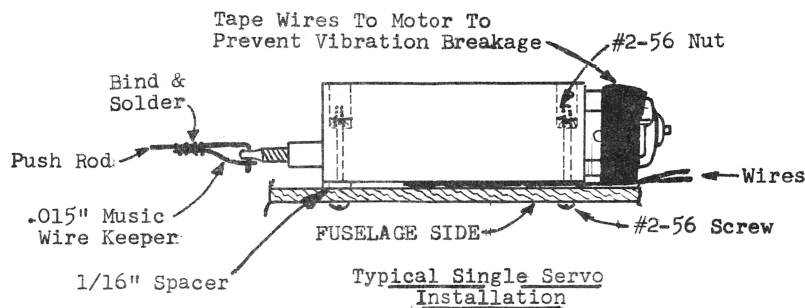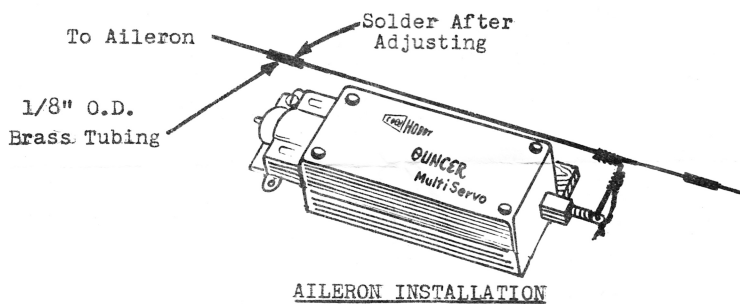

BROAD NEUTRAL



For Broad Neutral Cut Copper With Xacto Knife and Trim Off.

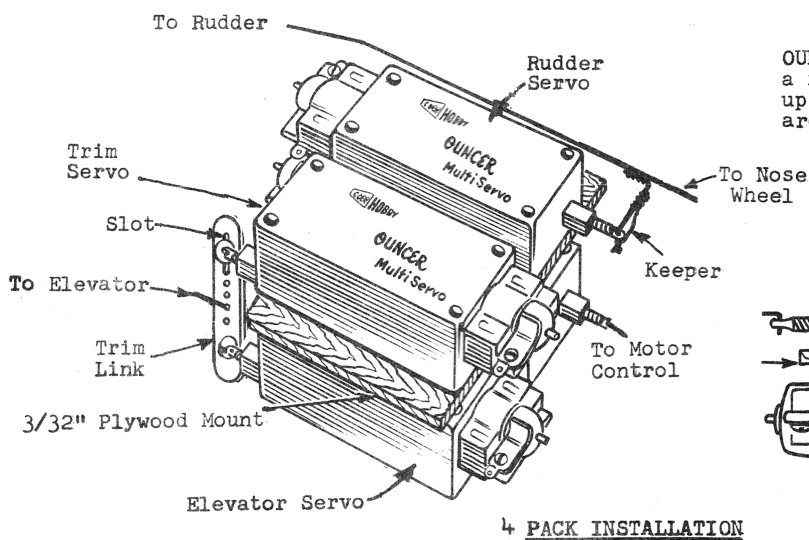

The small cross section size of the OUNCER allows installation of 4 servos in a fuselage only 2 1/2" wide and only takes up 2 1/8" in depth. Bicycle spoke nipples are used as adapters as shown.

