




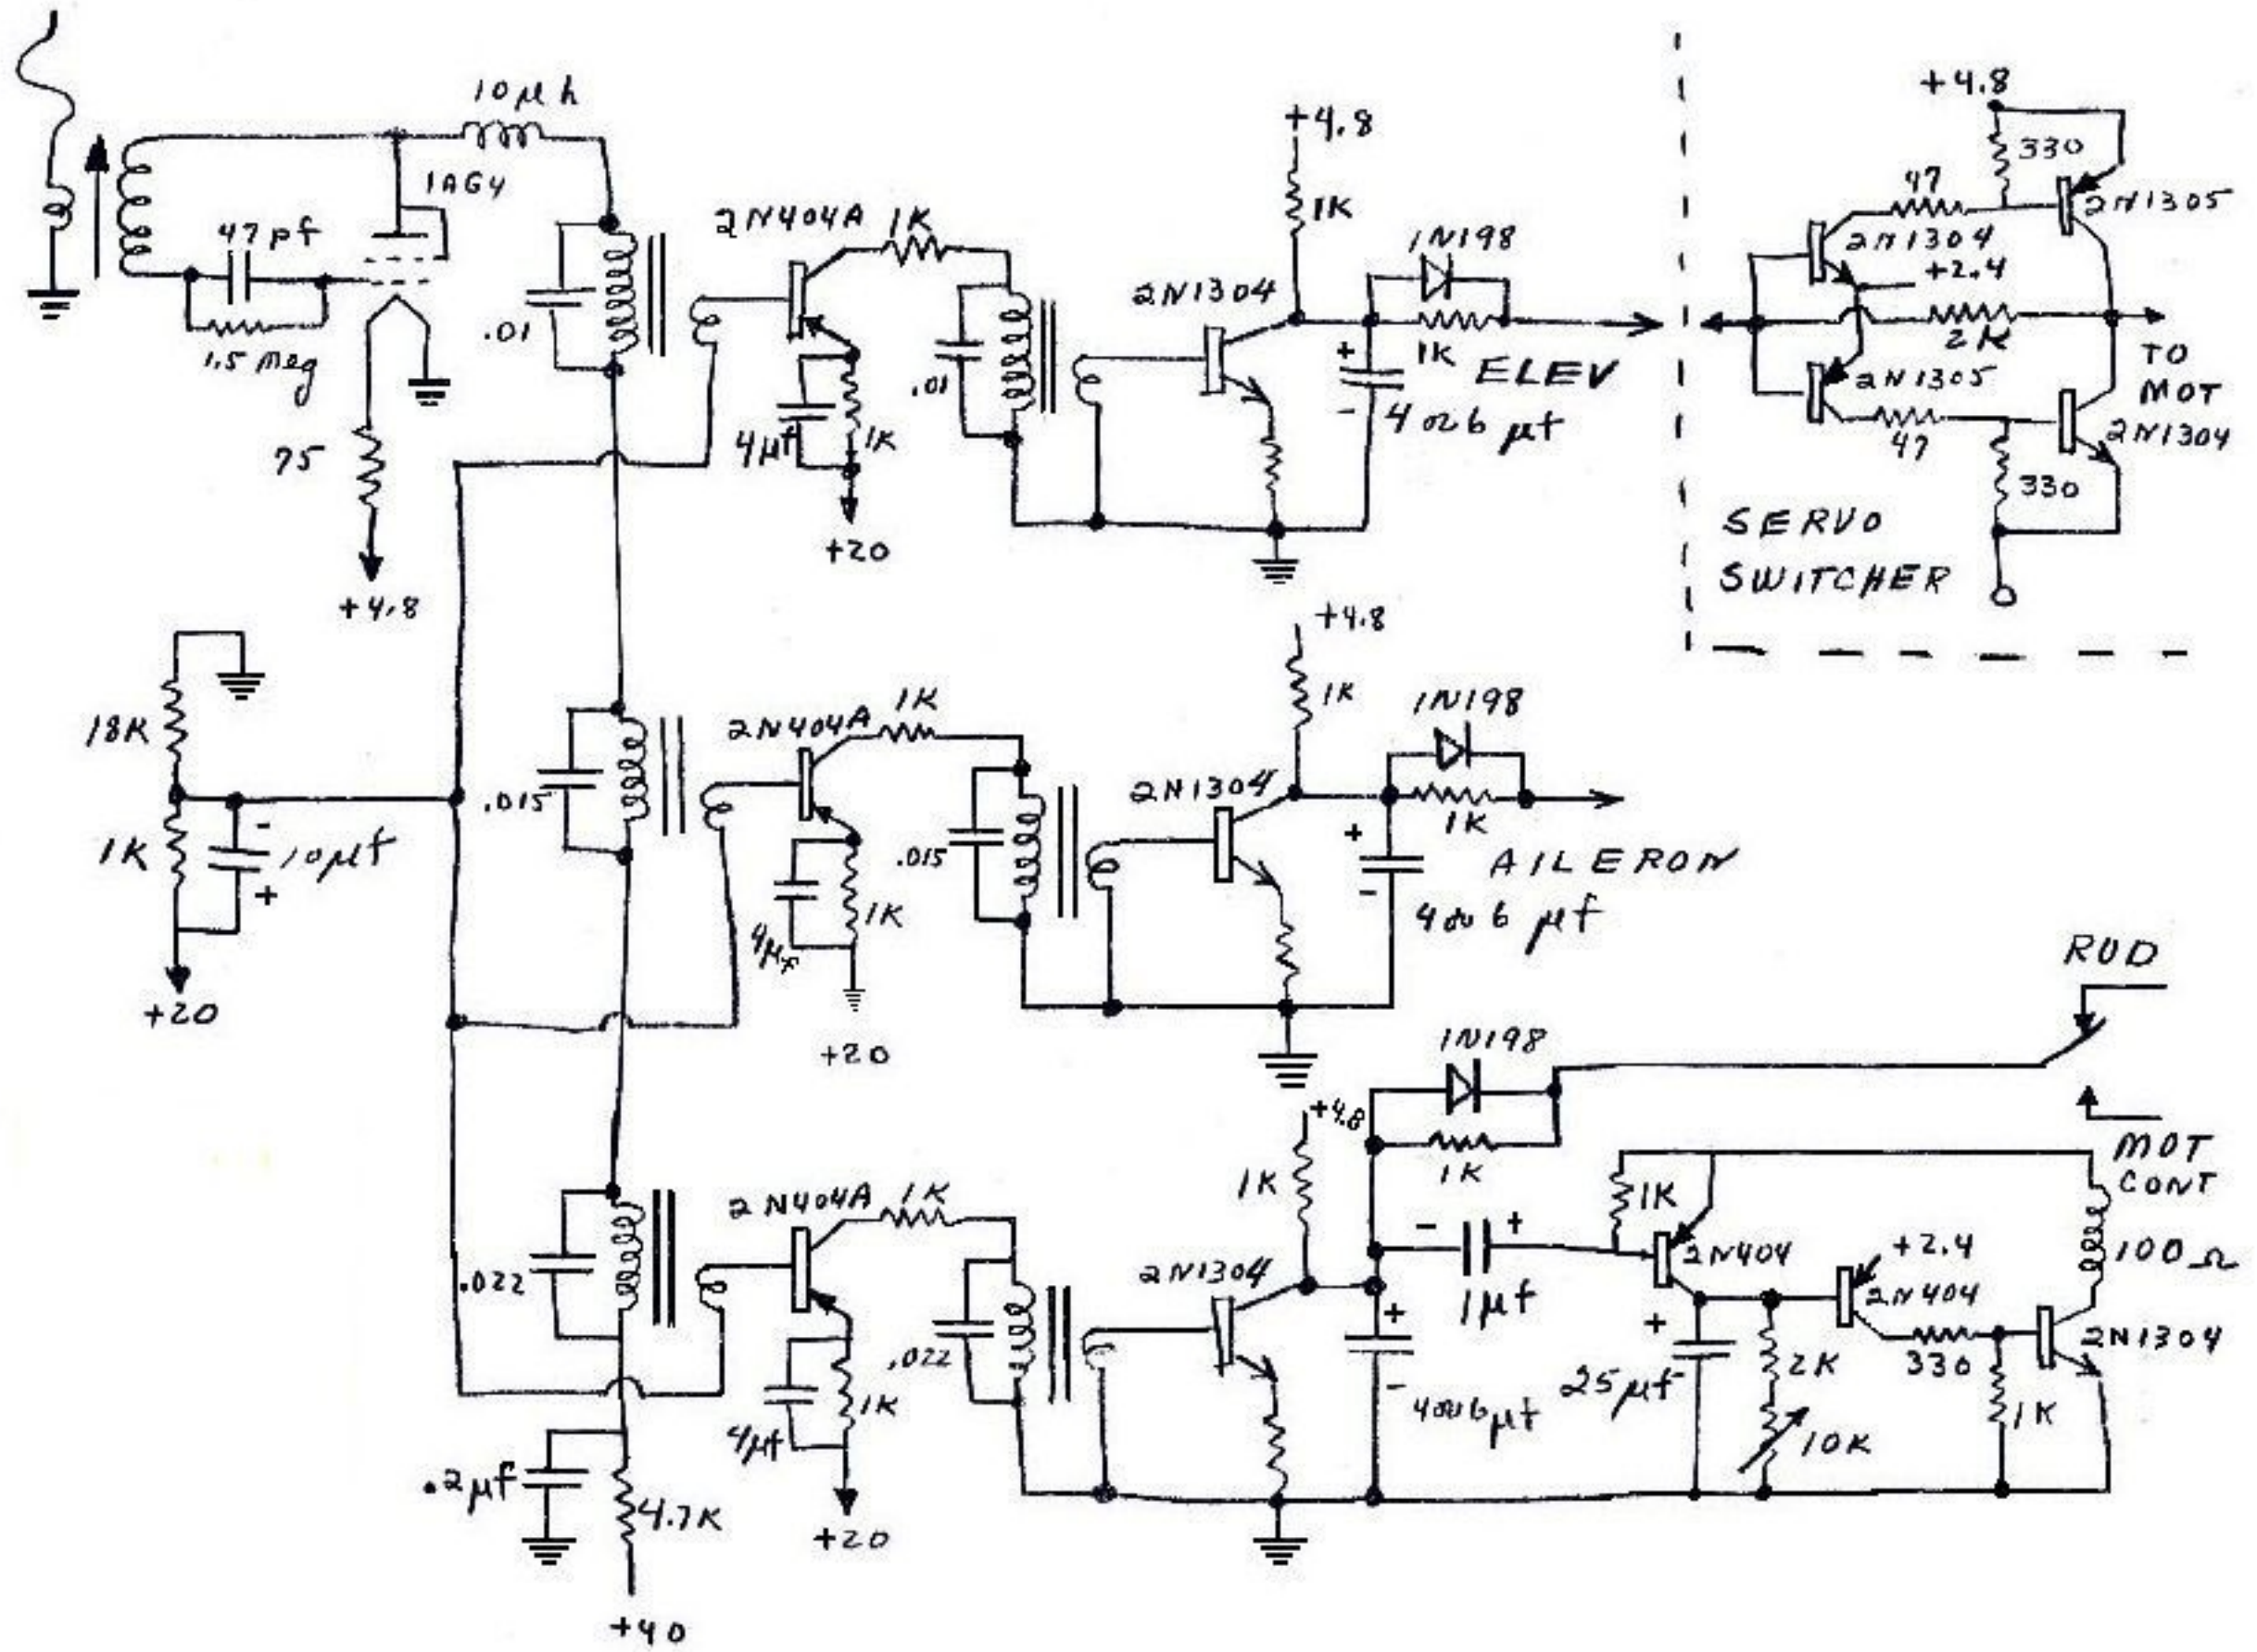

Quadruplex 21 superregen 50 MHz receiver

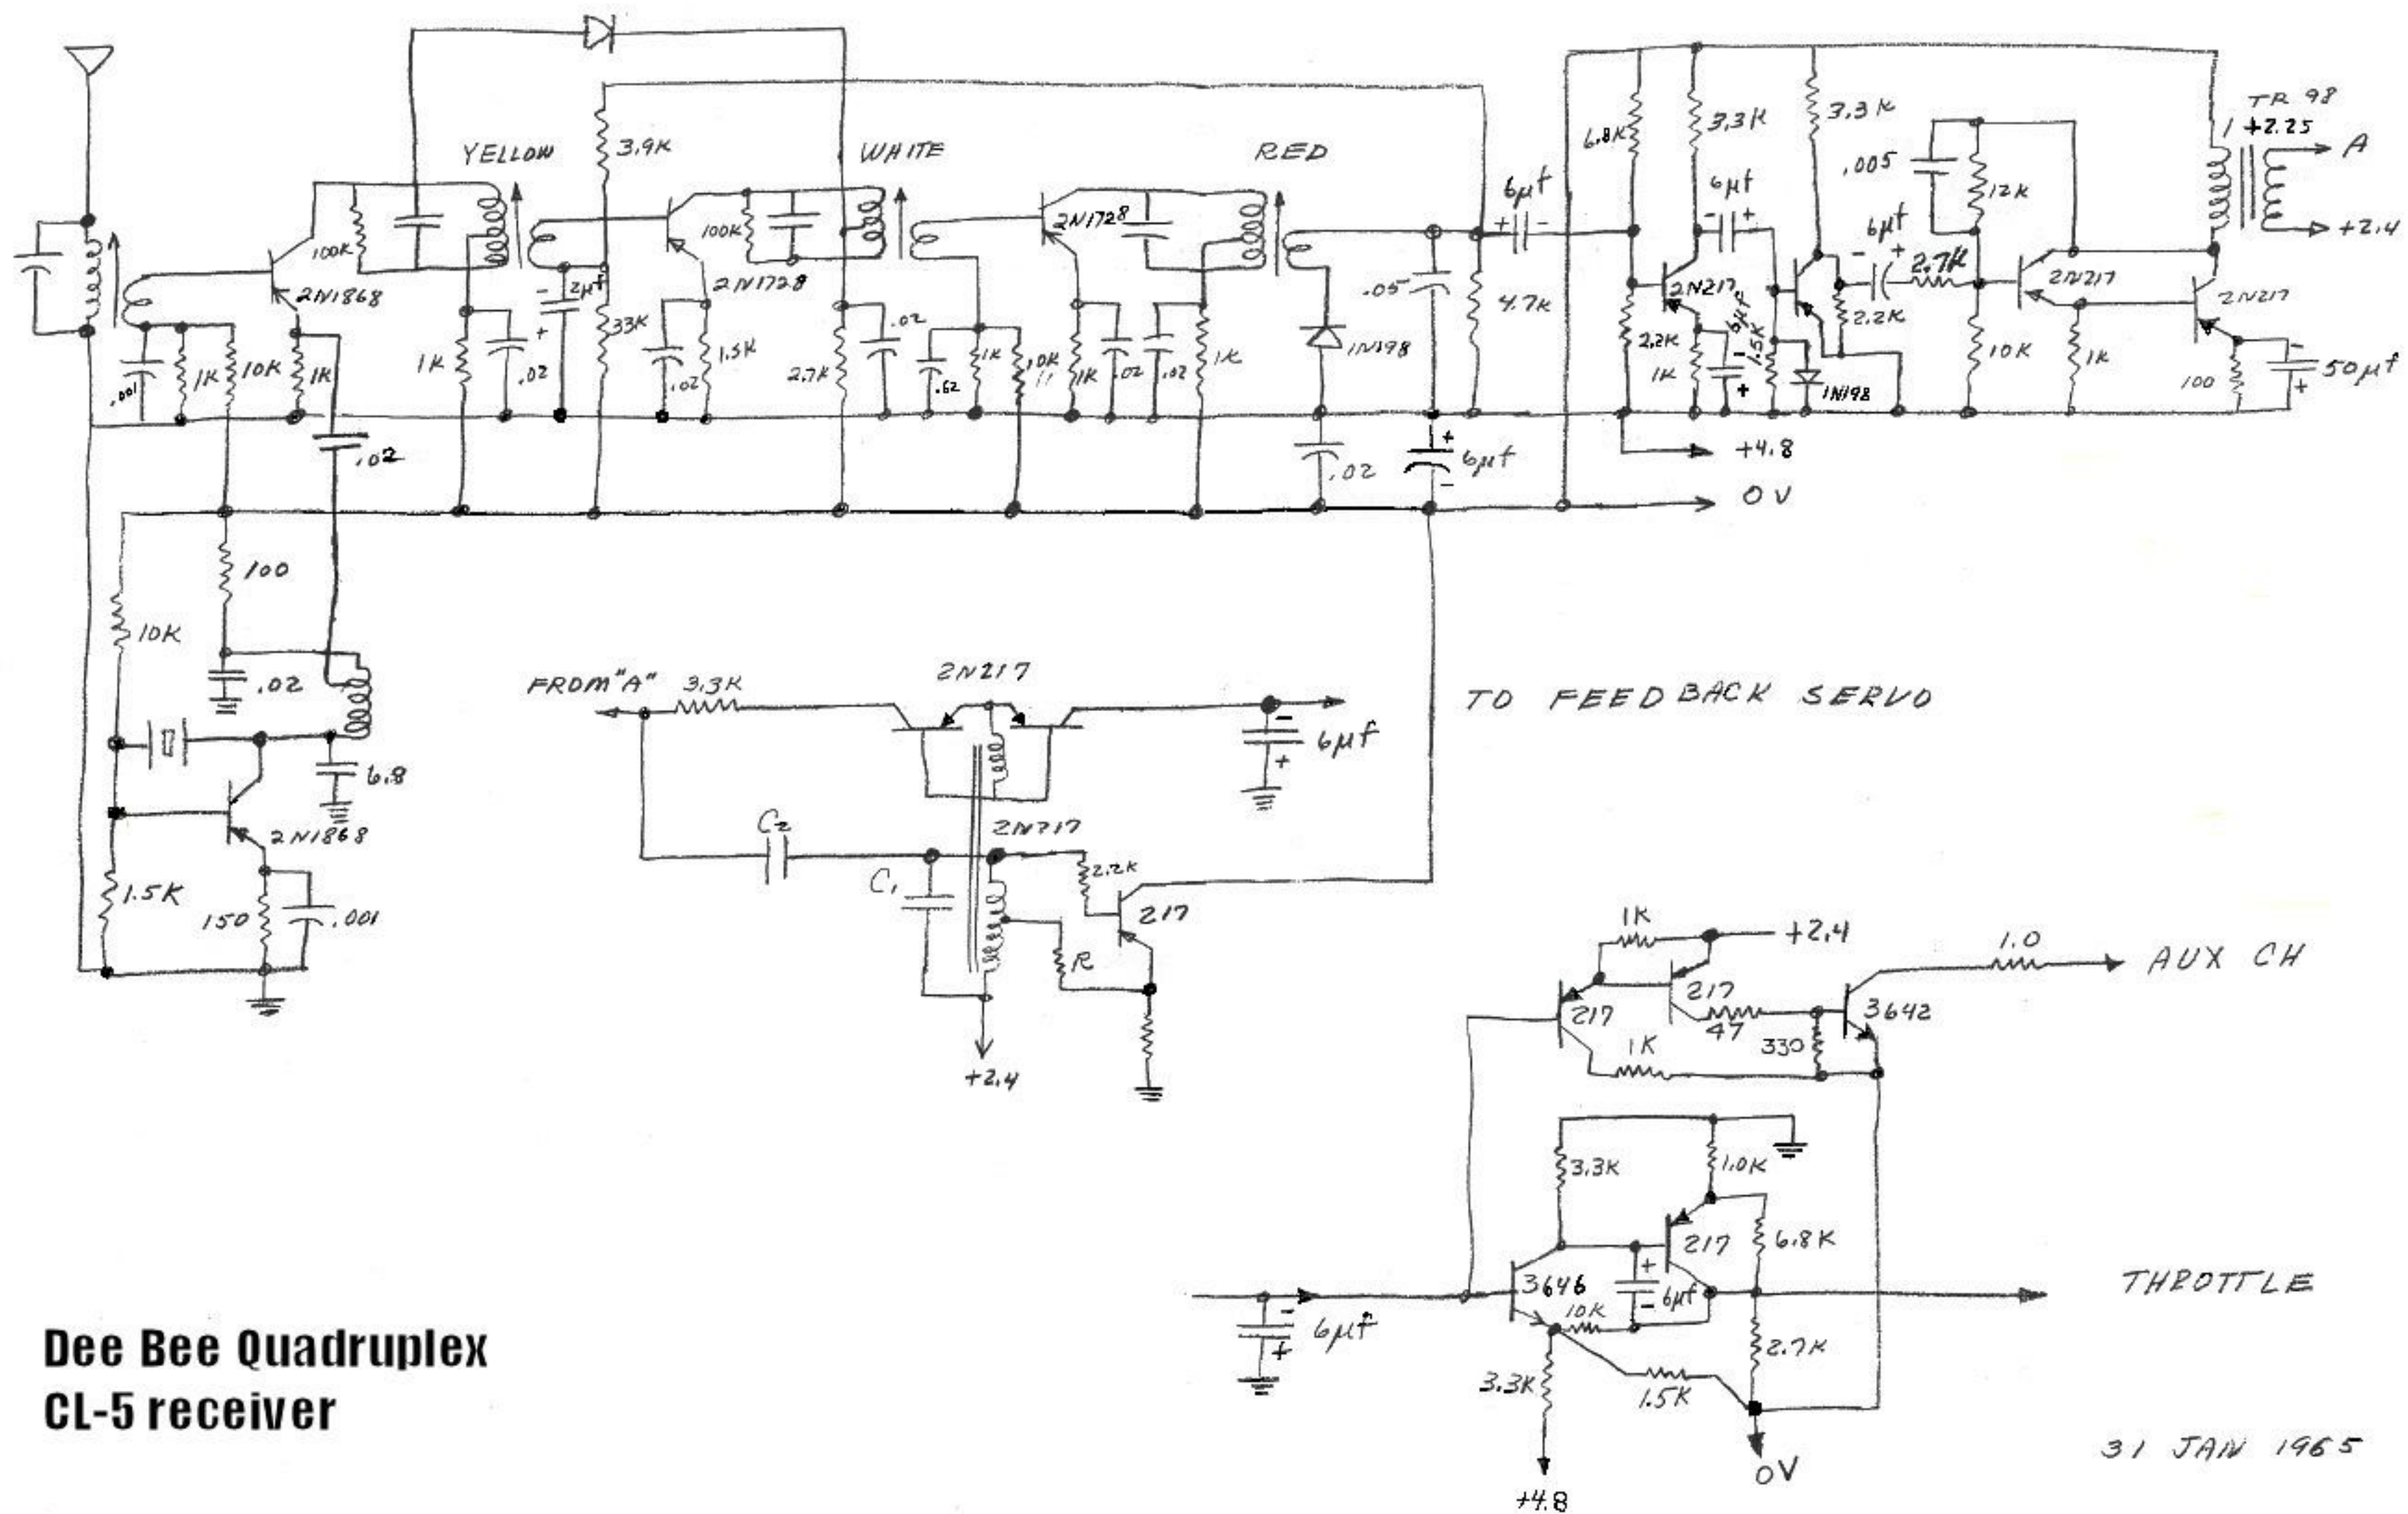

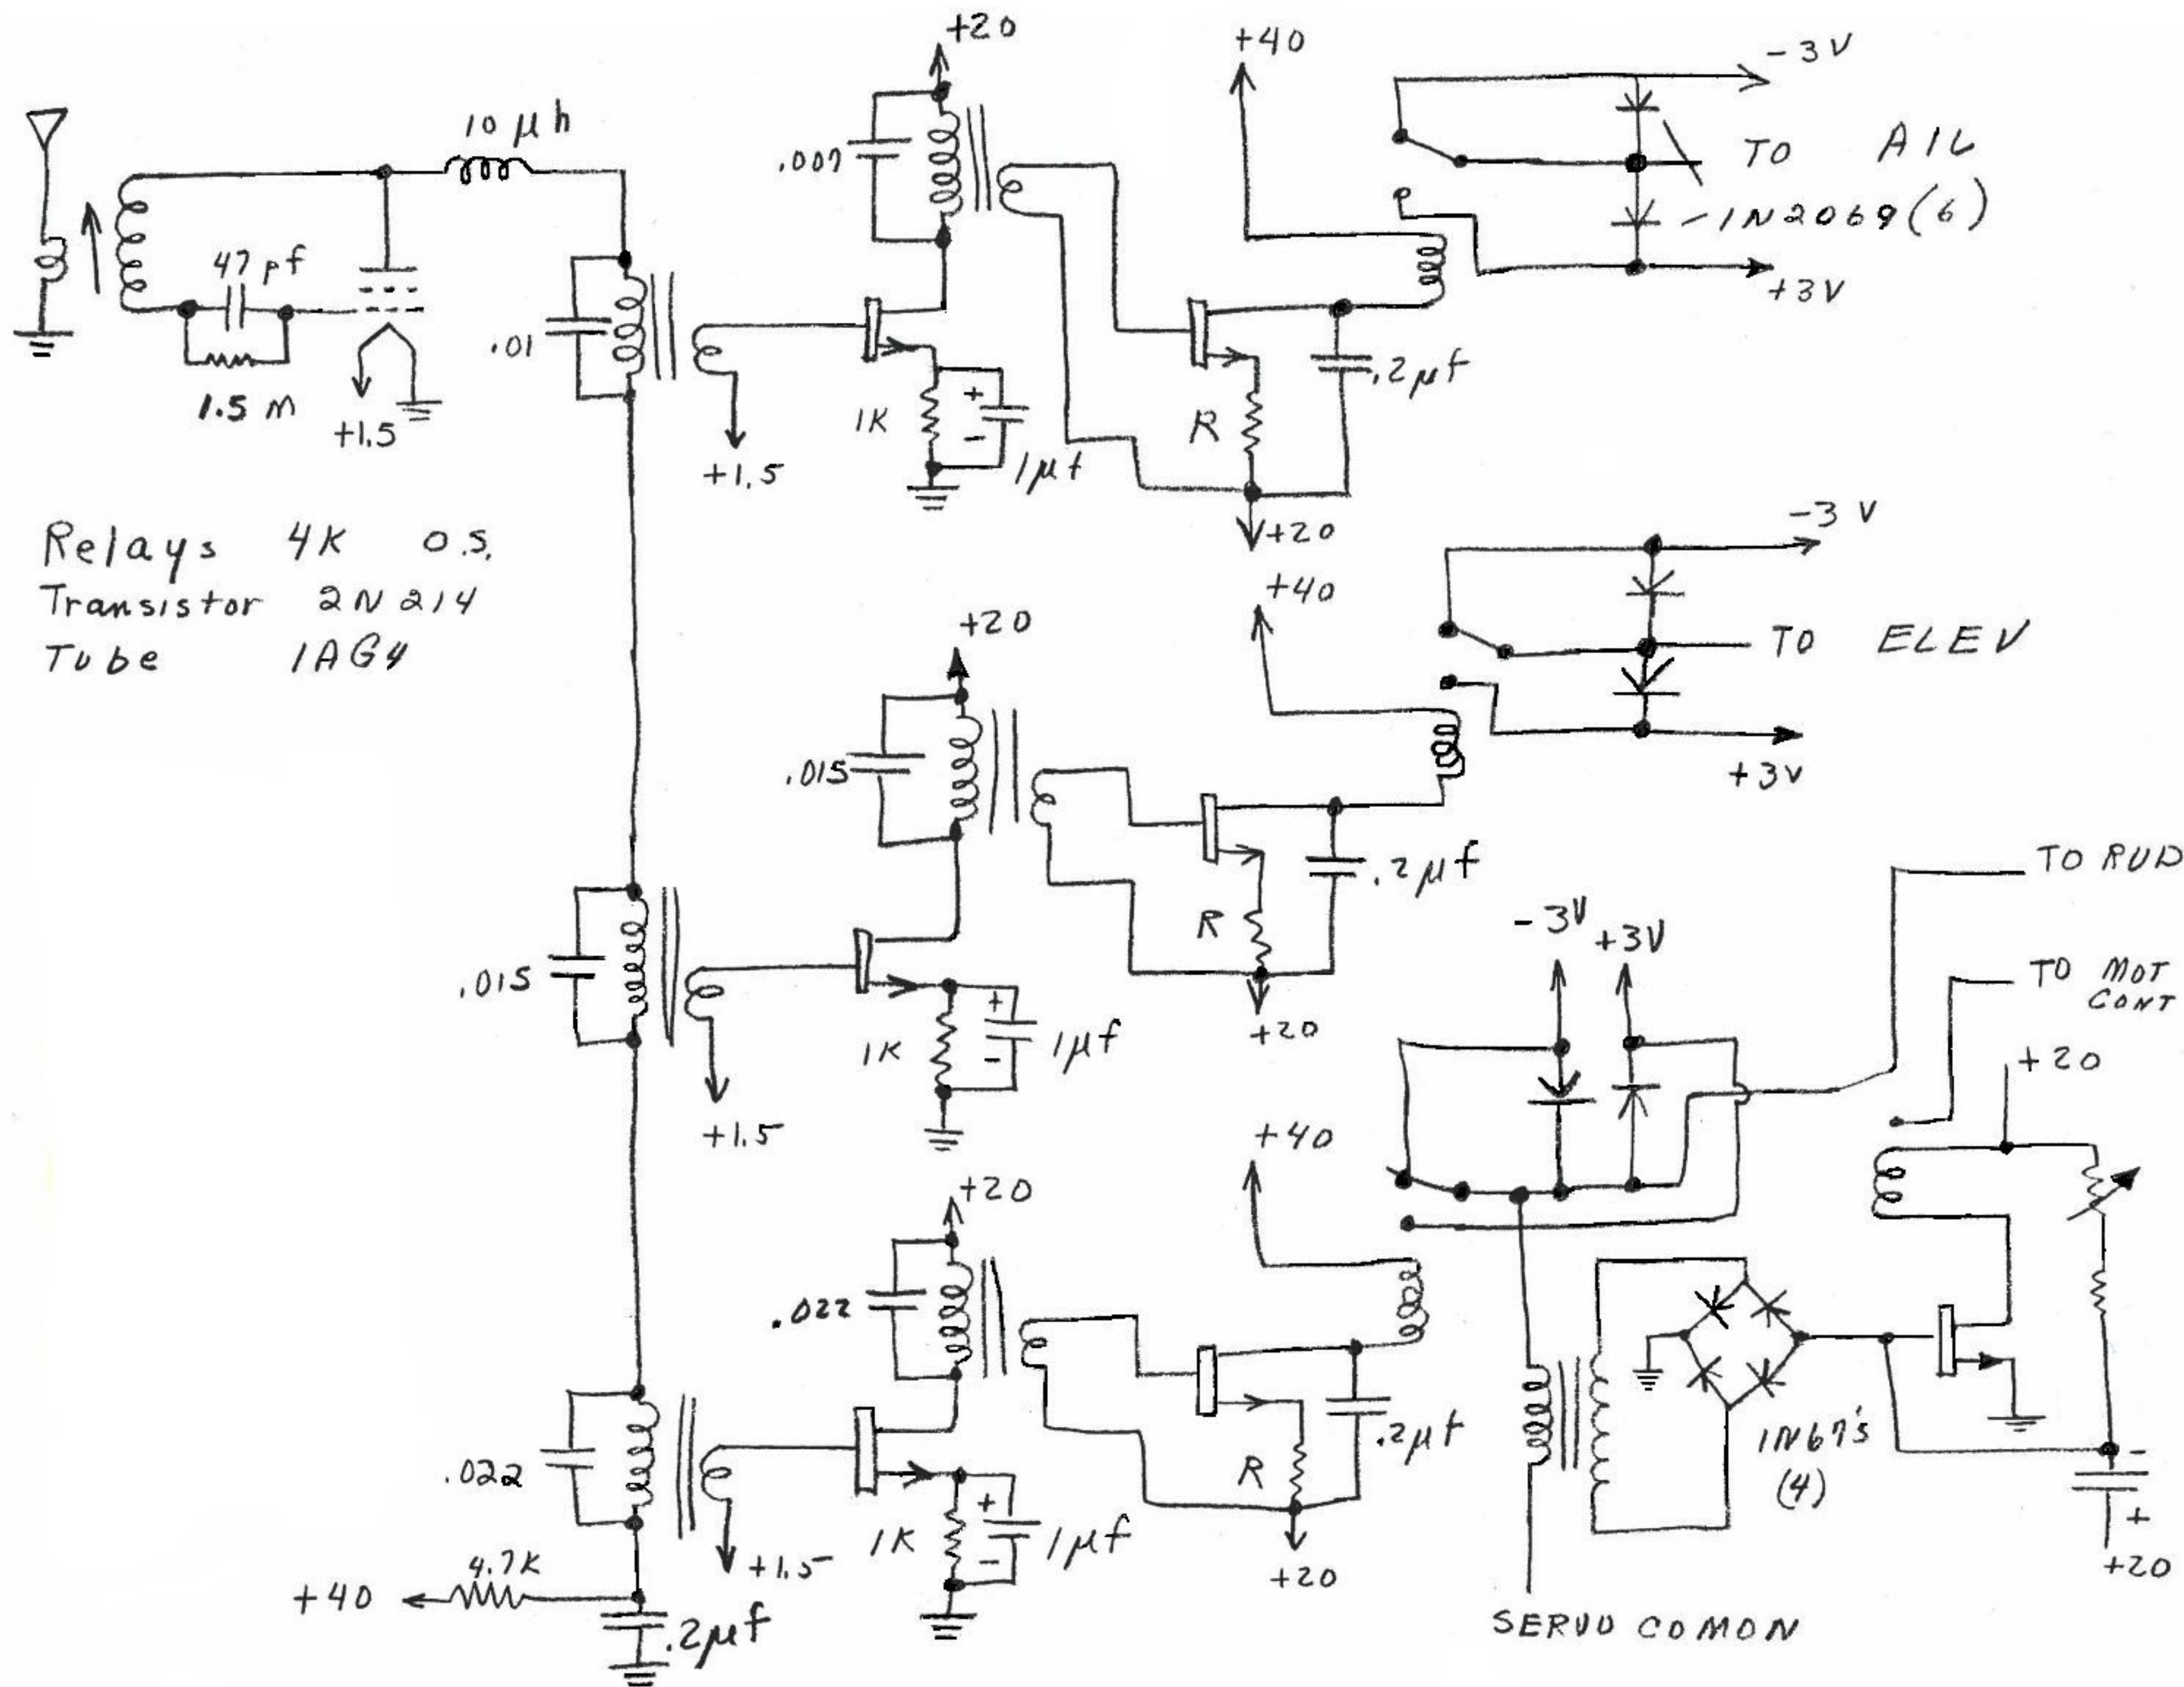

Quadruplex Mark I & II receiver

SHEET NO.1 OF 1
JOB NO.



ALL TONE AMPLITUDES
SHOULD BE APPROX
THE SAME AT TONE
TEST POINT.

ALL TUBES MUST BE
IN PLACE WHEN
OPERATING TRANS-
MITTER.

MODULATION = 95%
ON EACH CHANNEL
SEPARATE.

VOLTAGE READ
WITH VTVM OR
20 K Ω /VOLT
METER

* VALVES
DIFFER-
ENT FOR
EACH TONE
GEN.

