KPR-3C BRICK RECEIVER — FRONT END SERIES 1976-1977

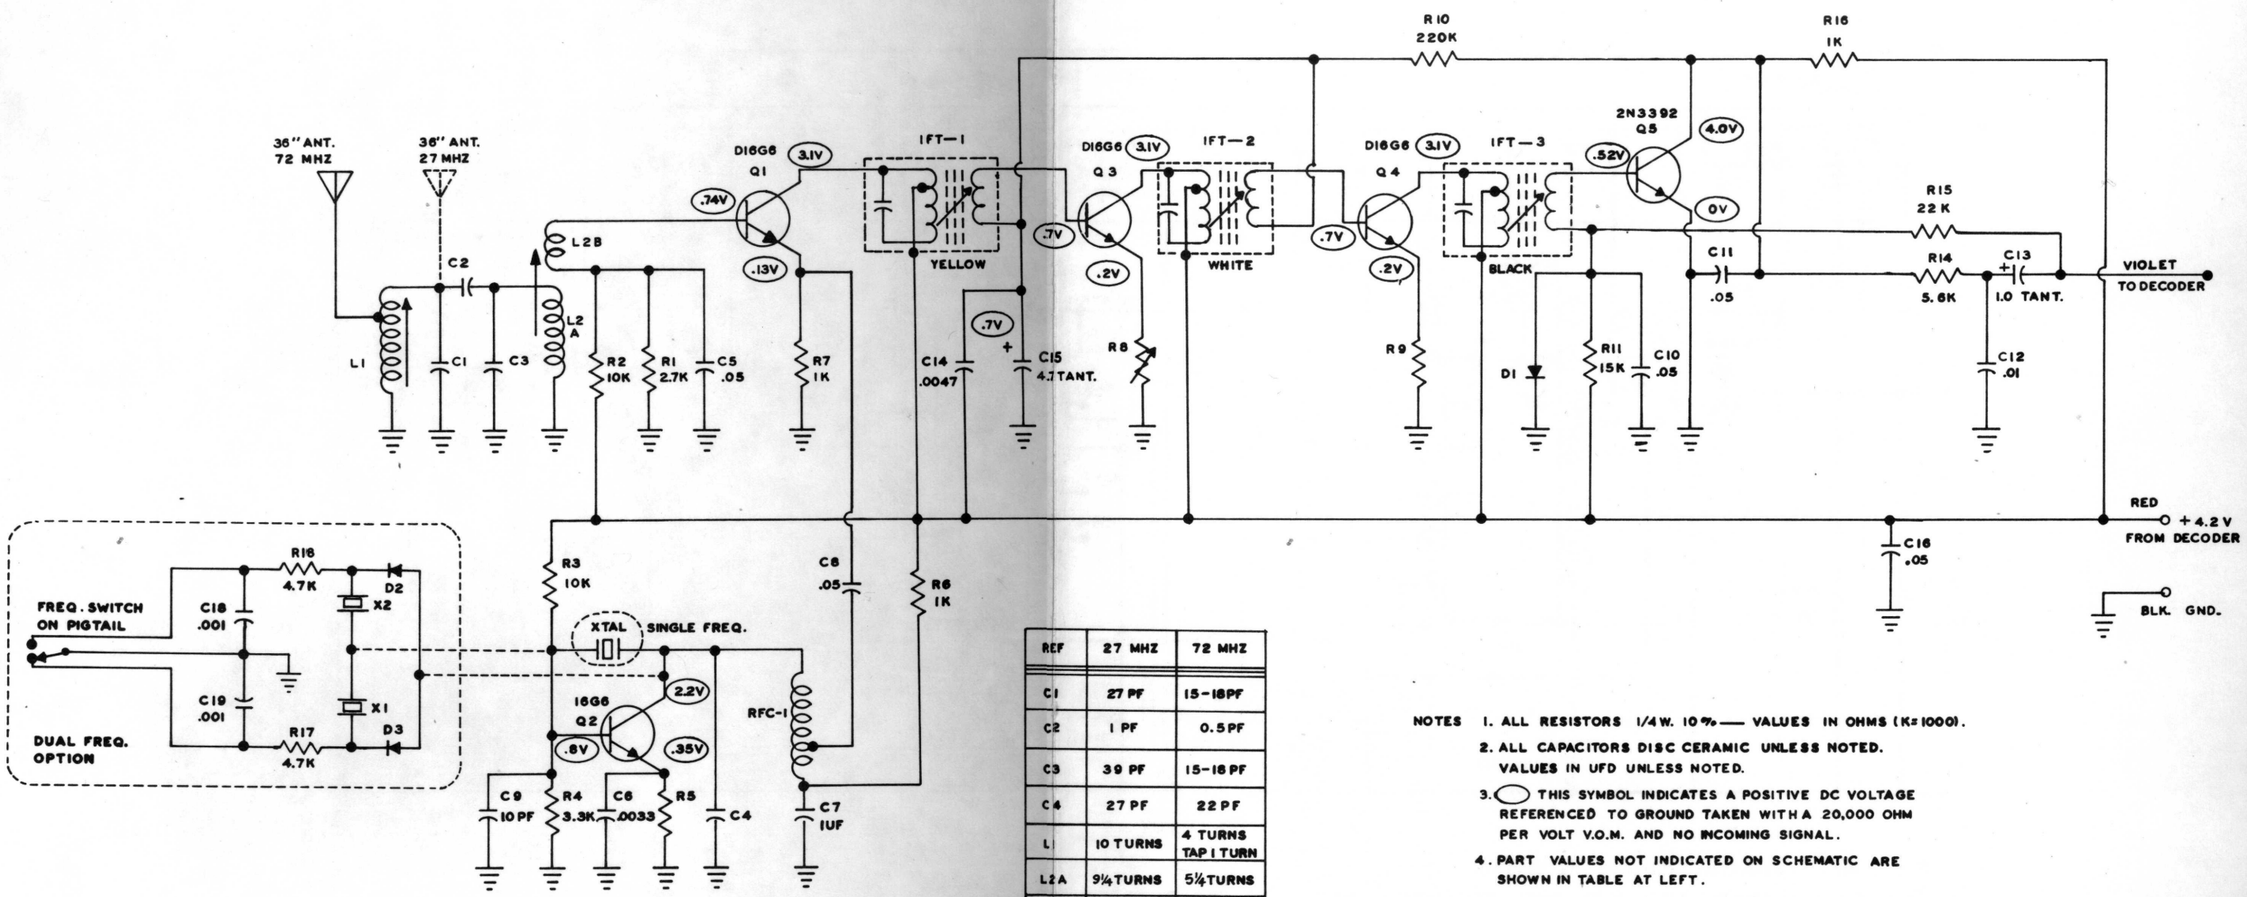

REF	27 MHZ	72 MHZ
C1	27 PF	15-18PF
C2	1 PF	0.5 PF
C3	39 PF	15-18 PF
C4	27 PF	22 PF
L1	10 TURNS	4 TURNS TAP 1 TURN
L2A	9¼ TURNS	5¼ TURNS
L2B	2½ TURNS	1¼ TURNS
R6	500 OHMS	500 OHMS
R5	470 OHMS	270 OHMS
R9	100 OHMS	100 OHMS

NOTES
1. ALL RESISTORS 1/4W. 10% — VALUES IN OHMS (K=1000).
2. ALL CAPACITORS DISC CERAMIC UNLESS NOTED. VALUES IN UFD UNLESS NOTED.
3. ◯ THIS SYMBOL INDICATES A POSITIVE DC VOLTAGE REFERENCED TO GROUND TAKEN WITH A 20,000 OHM PER VOLT V.O.M. AND NO INCOMING SIGNAL.
4. PART VALUES NOT INDICATED ON SCHEMATIC ARE SHOWN IN TABLE AT LEFT.

KRAFT SYSTEMS, INC.
VISTA, CA

FIGURE 30